



Insulated Male Buttet Disconnects



ITEM NO	Thickness	Dimension(mm)					Color	Specification
		d	F	D	H	L		
MPD 1.25-156	0.4	4	11	1.7	10	21	● red	Terminal: Brass Copper conductor:0.5-1.5mm ² (A.W.G 22-16) I Max = 10A
MPD 2-156	0.4	4	11	2.3	10	21	● Blue	Terminal: Brass Copper conductor:1.5-2.5mm ² (A.W.G 16-14) I Max = 15A
MPD 2-195	0.4	5	11	2.3	10	21		
MPD 5.5-195	0.4	5	12	4.3	13	25	● Yellow	Terminal: Brass Copper conductor:4-6mm ² (A.W.G 12-10) I Max = 24A

Insulated Receptacle Disconnects

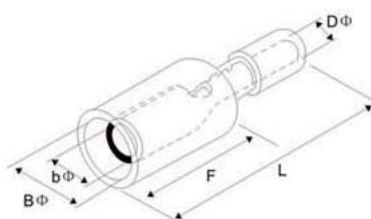

ITEM NO	Thickness	Dimension(mm)					Color	Specification
		d	F	D	H	L		
FRD 1.25-156	0.4	4	6.3	1.7	13	24.5	● red	Terminal: Brass Copper conductor:0.5-1.5mm ² (A.W.G 22-16) I Max = 10A
FRD 2-156	0.4	4	6.3	2.3	14	24.5	● Blue	Terminal: Brass Copper conductor:1.5-2.5mm ²
FRD 2-195	0.4	5	7	2.3	14	25.5		
FRD 5.5-195	0.4	5	7	3.4	14	29.5	● Yellow	Terminal: Brass Copper conductor:4-6mm ² (A.W.G 12-10) I Max = 24A