



Insulated Pin Terminals

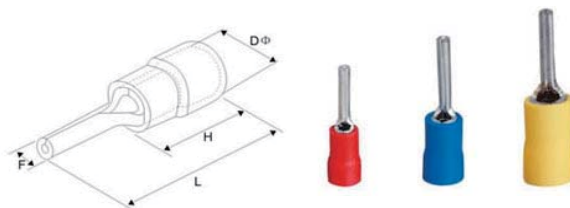

ITEM NO	Dimension(mm)				Color	Specification
	F	L	H	D		
PTV 1.25-9	1.9	19.0	10.0	4.3	● Red	conductor section: 0.5-1.5 mm ² (A.W.G: 22-16) Max Current: I max = 19A Thickness: 0.7mm
PTV 1.25-10	1.9	20.0				
PTV 1.25-12	1.9	22.0				
PTV 1.25-13	1.9	23.0				
PTV 1.25-18	1.9	28.0				
PTV 2-9	1.9	19.0	10.0	4.9	● Blue	conductor section: 1.5-2.5 mm ² (A.W.G: 16-14) Max Current: I max = 27A Thickness: 0.8mm
PTV 2-10	1.9	20.0				
PTV 2-12	1.9	22.0				
PTV 2-13	1.9	23.0				
PTV 2-18	1.9	28.0				
PTV 5.5-13	2.8	25.5	13.0	6.7	● Yellow	conductor section: 1.5-2.5 mm ² (A.W.G: 16-14) Max Current: I max = 15A, Thickness: 0.8mm
PTV 5.5-18	2.8	30.0				

Non-insulated Butt Connectors

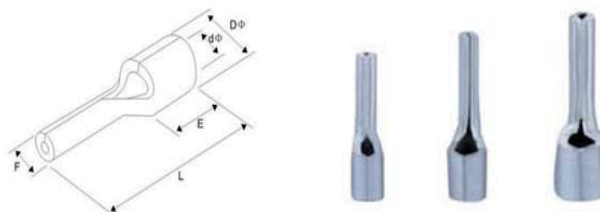

ITEM NO	Dimension(mm)					Specification
	F	L	E	D	D	
PTN 1.25-9	1.9	13.8	4.8	3.4	1.7	Terminal material: red copper conductor section: 0.5-1.5 mm ² (A.W.G: 22-16) Max Current: I max = 19A thickness: 0.7mm
PTN 1.25-10	1.9	14.8				
PTN 1.25-12	1.9	16.8				
PTN 1.25-13	1.9	17.8				
PTN 1.25-18	1.9	22.8				
PTN 2-9	1.9	13.8	4.8	4.1	2.3	Terminal material: red copper conductor section: 1.5-2.5 mm ² (A.W.G: 16-14) Max Current: I max = 27A thickness: 0.8 mm
PTN 2-10	1.9	14.8				
PTN 2-12	1.9	16.8				
PTN 2-13	1.9	17.8				
PTN 2-18	1.9	22.8				
PTN 3.5-10	1.9	14.8	6	5	3	Terminal material: red copper conductor section: 2.5-4 mm ² (A.W.G: 14-12) Max Current: I max = 37A thickness: 1.0mm
PTN 3.5-13	1.9	19.8				
PTN 5.5-13	2.8	19.8	6	5.6	3.4	Terminal material: red copper conductor section: 4-6mm ² (A.W.G: 12-10) Max Current: I max = 48A thickness: 1.0 mm
PTN 5.5-18	2.8	24.8				