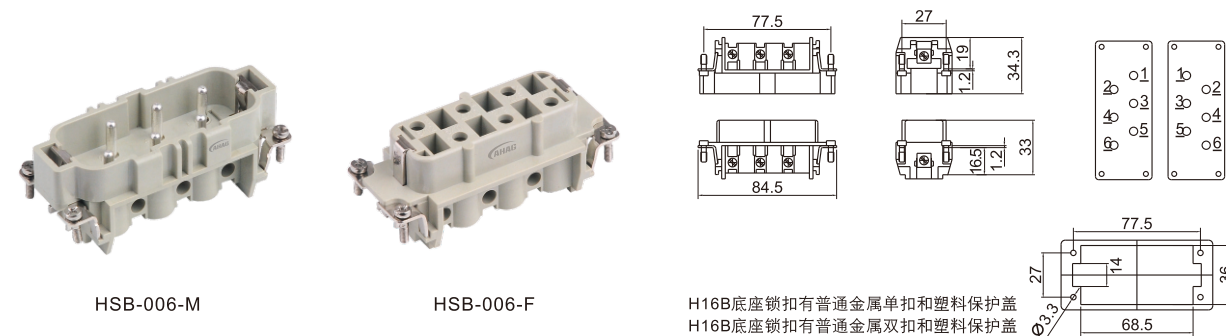
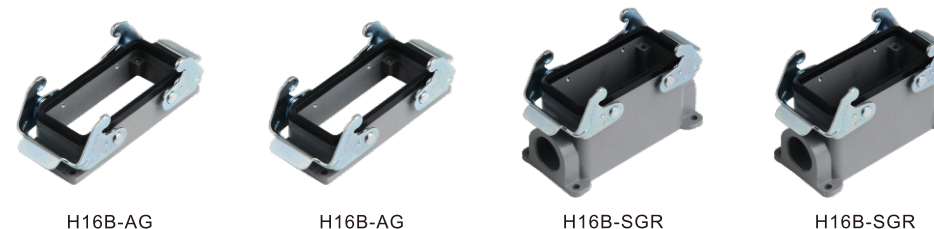
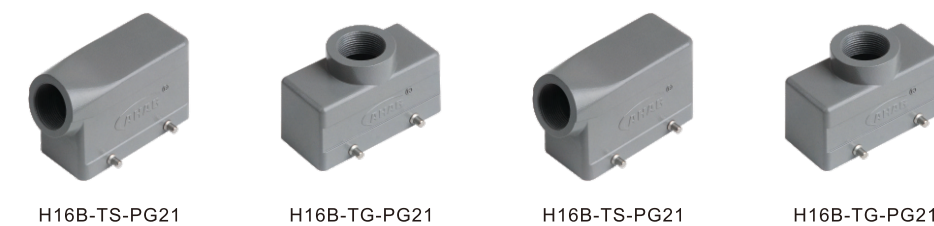


常用套件组合 / Set general introduction

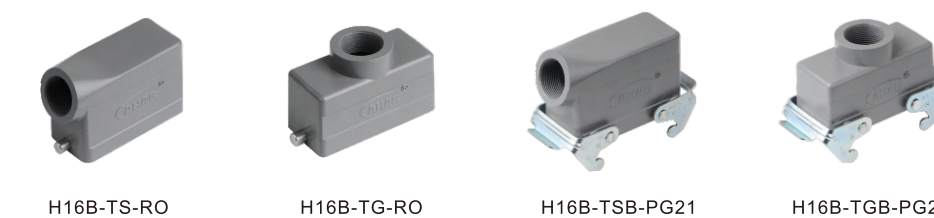
HSB-006系列 HSB-006 series



工作电流: 35A
工作电压: 400/690V
阻燃等级(据UL94): V0
防护等级: IP65
接线形式: 螺钉压接
弹片压接
冷压针压接
电缆入口可选螺纹:
M25, PG21, PG29, M32
Rated current: 35A
Rated voltage: 400/690V
Flammability acc. to UL94: V0
Degree of protection acc. to DIN40 050: IP65
Terminal: Screw terminal
Spring terminal
Crimp terminal
Thread: M25, PG21, PG29, M32



HDC-HSB-006-1 侧面进线/Side entry
HDC-HSB-006-2 正面进线/Top entry
HDC-HSB-006-3 侧面进线/Side entry
HDC-HSB-006-4 正面进线/Top entry



HDC-HSB-006-1D 侧面进线/Side entry
HDC-HSB-006-4D 正面进线/Top entry
HDC-HSB-006-1B 侧面进线/Side entry
HDC-HSB-006-4B 正面进线/Top entry

HSB INSERT SERIES

HSB插体系列

35A大电流连接器

常用套件组合 / Set general introduction

配套外壳 / Suit hood/housing

H16B 上壳 H16B hood	螺纹 Thread	型号 Type	图纸 Drawing
----------------------	--------------	------------	---------------

外壳上壳: 侧面进线
Hood: Side entry

	PG21 M25 M32	H16B-TS- PG21 M25 M32	
	PG29	高结构/High construction H16B-TSH- PG29	
	PG21 M25 M32	H16B-TS-RO- PG21 M25 M32	
	PG29	H16B-TSH-RO- PG29	
	PG21 PG29 M32	H16B-TSHB- PG21 PG29 M32	

侧面带双扣上壳
Side entry housing with 2 levers

	PG21 M25 M32	H16B-TSB- PG21 M25 M32	
	PG21 M25 M32	H16B-TS- PG21 M25 M32	
	PG29	H16B-TSHB- PG29	

外壳上壳: 顶部进线
Hood: Top entry

	PG21 M25 M32	H16B-TG- PG21 M25 M32	
--	--------------------	--------------------------------	--

H16B 上壳/底座 H16B hood/housing	螺纹 Thread	型号 Type	图纸 Drawing
---------------------------------	--------------	------------	---------------

外壳上壳: 顶部进线
Hood: Top entry

	PG29	高结构/High construction H16B-TGH- PG29	
	PG21 M25 M32	H16B-TG-RO- PG21 M25 M32	
	PG29	H16B-TGH-RO- PG29	

顶部带双扣上壳
Top entry housing with 2 levers

	PG21 M25 M32	H16B-TGB- PG21 M25 M32	
--	--------------------	---------------------------------	--

外壳底座: 开孔安装
Bulkhead: mounted

	H16B-AG	
--	---------	--

	H16B-AG-LB	
--	------------	--

外壳底座: 表面安装
Surface mounted: Side entry

	PG21 PG29 M25	H16B-SGR- PG21 PG29 M25	
--	---------------------	----------------------------------	--

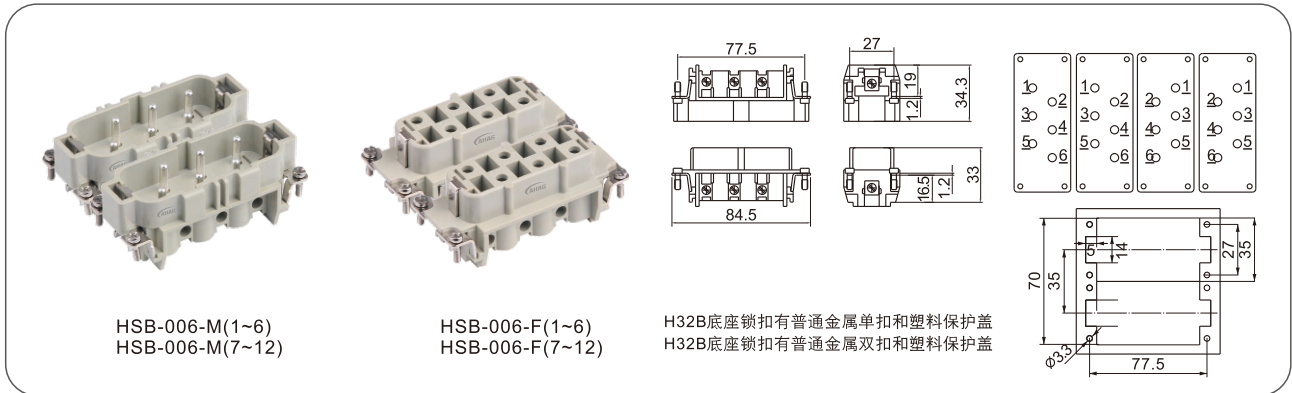
4耳带盖底座
Bulkhead mounted with 2 bolts

	H16B-AD-BO	
--	------------	--

	PG21 PG29 M25	H16B-SDR-BO- PG21 PG29 M25	
--	---------------------	-------------------------------------	--

常用套件组合 / Set general introduction

HSB-012系列 HSB-012 series



工作电流: 35A
工作电压: 400/690V
阻燃等级(据UL94): V0
防护等级: IP65
接线形式: 螺钉压接
弹片压接
冷压针压接
电缆入口可选螺纹:
M25, PG21, PG29, M32
Rated current: 35A
Rated voltage: 400/690V
Flammability acc. to UL94: V0
Degree of protection acc. to DIN40 050: IP65
Terminal: Screw terminal
Spring terminal
Crimp terminal
Thread: M25, PG21,
PG29, M32

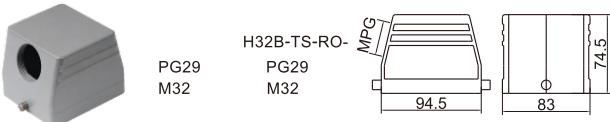
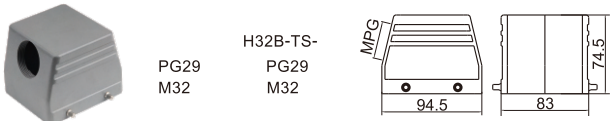
H32B-TS-PG29	H32B-TG-PG29	H32B-TS-RO	H32B-TG-RO
H32B-AG	H32B-AG	H32B-AG-LB	H32B-AG-LB
HSB-012-1	HSB-012-2	HSB-012-1D	HSB-012-2D
侧面进线/Side entry	正面进线/Top entry	侧面进线/Side entry	正面进线/Top entry
H32B-TS-PG29	H32B-TG-PG29	H32B-TS-RO	H32B-TG-RO
H32B-SGR	H32B-AG-LB	H32B-SGR-LB	H32B-SDR-LB
HSB-012-3	HSB-012-4	HSB-012-3D	HSB-012-4DB
侧面进线/Side entry	正面进线/Top entry	侧面进线/Side entry	正面进线/Top entry

常用套件组合 / Set general introduction

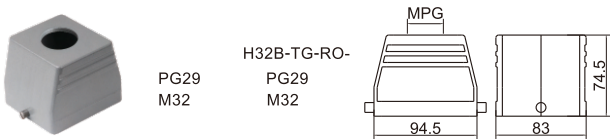
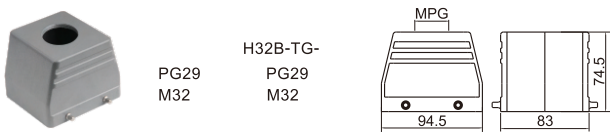
配套外壳 / Suit hood/housing

H32B 上壳 H32B hood	螺纹 Thread	型号 Type	图纸 Drawing
----------------------	--------------	------------	---------------

外壳上壳: 侧面进线
Hood: Side entry

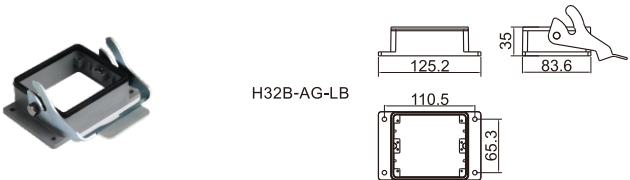
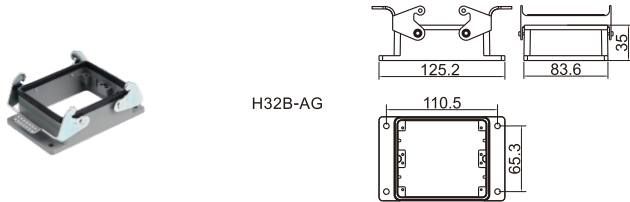


外壳上壳: 顶部进线
Hood: Top entry

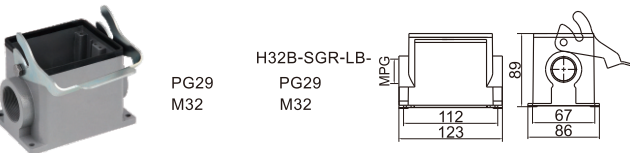


H32B 底座 H32B housing	螺纹 Thread	型号 Type	图纸 Drawing
-------------------------	--------------	------------	---------------

外壳底座: 开孔安装
Bulkhead: mounted





外壳底座: 开孔安装
Bulkhead: mounted







HK INSERT SERIES
HK插体系列
大电流连接器

常用套件组合 / Set general introduction

HK系列 HK series










H16B底座锁扣有普通金属单扣和塑料保护盖
H16B底座锁扣有普通金属双扣和塑料保护盖









工作电流: 80A
工作电压: 400/690V
阻燃等级(据UL94): V0
防护等级: IP65
接线形式: 螺钉压接
弹片压接
电缆入口可选螺纹:
M25, PG21, PG29, M32
Rated current: 80A
Rated voltage: 400/690V
Flammability acc. to UL94: V0
Degree of protection acc. to DIN40 050: IP65
Terminal: Screw terminal
Spring terminal
Crimp terminal
Thread: M25, PG21, PG29, M32

			
H16B-TS-PG21	H16B-TG-PG21	H16B-TS-PG21	H16B-TG-PG21
			
H16B-AG	H16B-AG	H16B-SGR	H16B-SGR
HDC-HK-004-1	HDC-HK-004-2	HDC-HK-004-3	HDC-HK-004-4
侧面进线/Side entry	正面进线/Top entry	侧面进线/Side entry	正面进线/Top entry
			
H16B-TS-RO	H16B-TG-RO	H16B-TSB-PG21	H16B-TGB-PG21
			
H16B-AG-LB	H16B-SGR-LB	H16B-AD-BO	H16B-SDR-BO
HDC-HK-004-1D	HDC-HK-004-4D	HDC-HK-004-1B	HDC-HK-004-4B
侧面进线/Side entry	正面进线/Top entry	侧面进线/Side entry	正面进线/Top entry

常用套件组合 / Set general introduction

配套外壳 / Suit hood/housing

H16B 上壳 H16B hood	螺纹 Thread	型号 Type	图纸 Drawing
外壳上壳: 侧面进线 Hood: Side entry			
	PG21 M25 M32	H16B-TS- PG21 M25 M32	
	PG29	高结构/High construction H16B-TSH- PG29	
	PG21 M25 M32	H16B-TS-RO- PG21 M25 M32	
	PG29	H16B-TSH-RO- PG29	
	PG21 PG29 M32	H16B-TSHB- PG21 PG29 M32	
侧面带双扣上壳 Side entry housing with 2 levers			
	PG21 M25 M32	H16B-TSB- PG21 M25 M32	
	PG21 M25 M32	H16B-TS- PG21 M25 M32	
	PG29	H16B-TSHB- PG29	
外壳上壳: 顶部进线 Hood: Top entry			
	PG21 M25 M32	H16B-TG- PG21 M25 M32	

H16B 上壳/底座 H16B hood/housing	螺纹 Thread	型号 Type	图纸 Drawing
外壳上壳: 顶部进线 Hood: Top entry			
	PG29	高结构/High construction H6B-TGH- PG29	
	PG21 M25 M32	H16B-TG-RO- PG21 M25 M32	
	PG29	H16B-TGH-RO- PG29	
顶部带双扣上壳 Top entry housing with 2 levers			
	PG21 M25 M32	H16B-TGB- PG21 M25 M32	
外壳底座: 开孔安装 Bulkhead: mounted			
		H16B-AG	
		H16B-AG-LB	
外壳底座: 表面安装 Surface mounted: Side entry			
	PG21 PG29 M25	H16B-SGR- PG21 PG29 M25	
4耳带盖底座 Bulkhead mounted with 2 bolts			
		H16B-AD-BO	
	PG21 PG29 M25	H16B-SDR-BO- PG21 PG29 M25	